


POWERTRACK

TECHNICAL DATA



Module/Accessory	Description	Length	Width	Height	Weight	IP rating	Point load	Lumen	Ampage	Voltage	Internal cable core size	WARRANTY
Long Runner (PTE120)	Longest connecting module.	1200mm	258mm	29mm	4kg	IP65	500kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Medium Runner (PTE060)	Mid length connecting module.	600mm	258mm	29mm	2kg	IP65	500kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Short Runner (PTE020)	Shortest connecting module.	200mm	258mm	29mm	1kg	IP65	500kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Lighting (PTLS00)	Provides both safety and task lighting 30,000 hours LED life span.	1200mm	258mm	29mm	3kg	IP65	80kg	2000	16amp	110v	4mm power/2.5mm lighting	2 years
Lighting E/L (PTLE00)	Emergency enabled luminaire. 30,000 hours LED life span. Emergency back up 1 hour. Battery test and off switch to prevent battery drain down.	1200mm	258mm	29mm	3.5kg	IP65	80kg	2000	16amp	110v	4mm power/2.5mm lighting	2 years
4-Way (PTX000)	Facilitates connections for corners, T-arrangement and 4-way direction.	600mm	600mm	29mm	4kg	IP65	500kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Power (PTPP00)	Power module providing 16amp female commando outlet.	200mm	258mm	29mm	1.2kg	IP65	500kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Starter (PTFCIS)	Connects to a transformer and is the first module in a run of Powertrack. The in-line switch allows standard light modules to be switched on and off. Emergency lights will remain on and charged.	200mm (Not including leads)	258mm	29mm	1.2kg	IP65	100kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Converter - Powertrack to Traditional 110v (PTCM43)	Enables conversion from Powertrack to standard 110v leads.	200mm (Not including leads)	258mm	29mm	1.2kg	IP65	100kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Converter - Traditional 110v to Powertrack (PTCF43)	Enables conversion back from standard 110v leads to Powertrack.	200mm (Not including leads)	258mm	29mm	1.2kg	IP65	100kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Slinky (PTS000)	Provides flexibility to overcome change of levels and planning at any angle.	1000mm	258mm	29mm	2.5kg	IP65	100kg	n/a	16amp	110v	4mm power/2.5mm lighting	3 years
Test Leads (PTTL00)	Enables electrical testing of modules.	600mm	n/a	n/a	n/a	IP65	n/a	n/a	n/a	n/a	4mm power/2.5mm lighting	1 year
End Cap (PTEC00)	Protects exposed end of modules where needed.	150mm	258mm	29mm	0.75kg	IP65	500kg	n/a	n/a	n/a	n/a	3 years
Power Pallet (PTPP00)	Provides storage and transport for modules.	1200mm	1000mm	1500mm	Empty: 40kg Full: 500kg	n/a	n/a	n/a	n/a	n/a	n/a	1 year

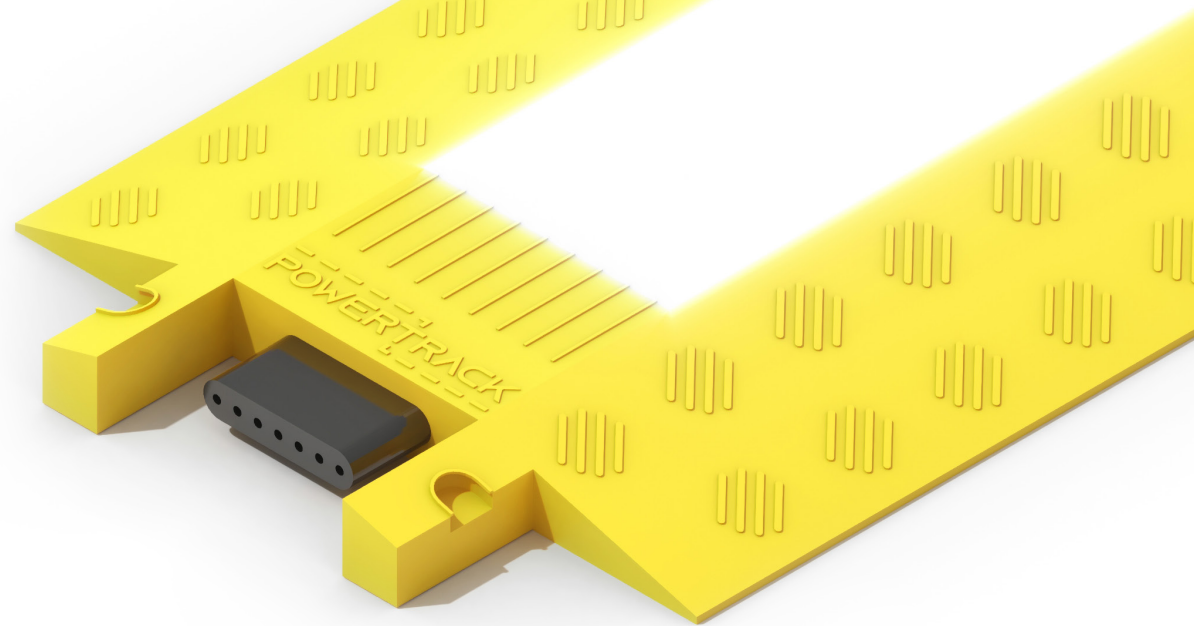